


Ox-FAC-xx

Field Angled Cleaver



- Low back-reflection for reduced noise
- Highly repeatable cleave angle
- Stapler action for easy use
- Angled cleaving of SM and PM fiber
- Fiber loaded in standard holder for angled mechanical splice

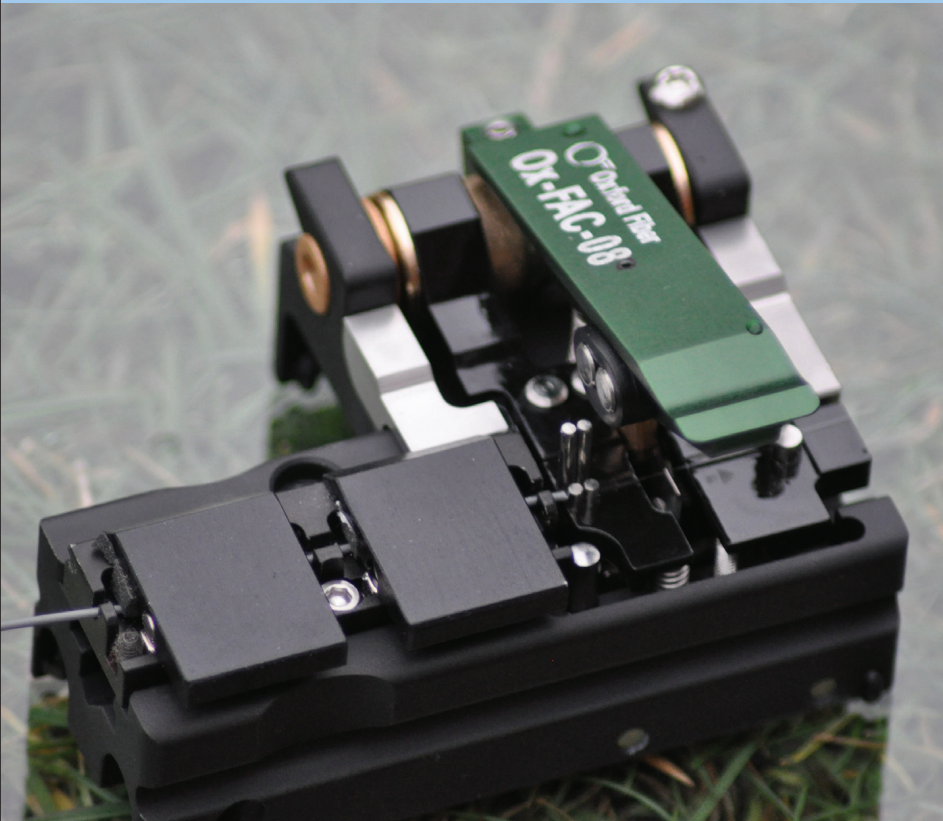

OXFORD FIBER

Oxford Fiber Ltd
Sir Frank Whittle Business Centre
Gt. Central Way, Butlers Leap
Rugby CV21 3XH. UK

Tel +44 (0) 1788 226 010
Website www.oxfordfiber.com
Email sales@oxfordfiber.com

Features



- Staple action for easy use
- Rugged construction for field use
- 10 position blade for extended life
- Benchtop and handheld operation
- Easy fiber loading using customer-supplied holder
- Compatible with angled mechanical splice

Ox-FAC-xx

Field Angled Cleaver

Specifications

Fiber Diameter	125µm SMF or PM
Cleave Angle	8° (+/-2°)
Blade Life	10,000 estimated
Dimensions (max)	67mm x 47mm x 79mm long (2.7" x 1.9" x 3.1")
Weight	200g
Cleave Length	8mm minimum - set by fiber holder

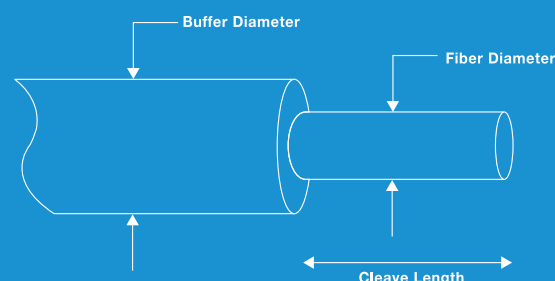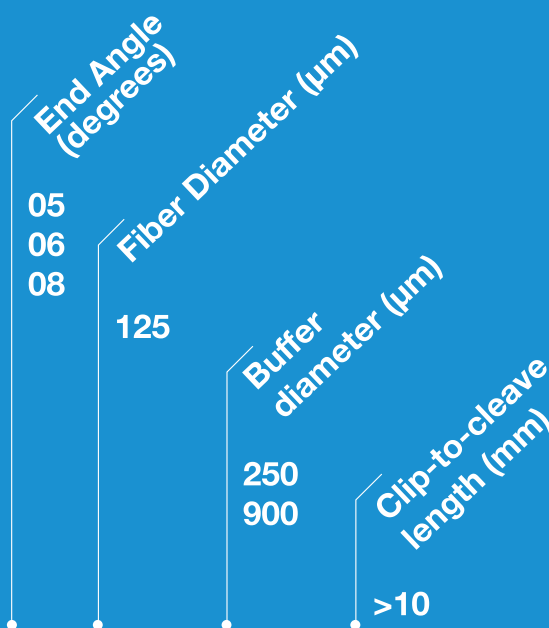

Full Description

Ox-FAC-*/*/125/YYYY/Z

Example

Ox-FAC-08/125/250/10

If you require a cleaver for any other fiber type, or a custom cleaver, please contact Oxford Fiber or your local agent.

This specification may be changed without notice due to technical advances



OXFORD FIBER